ABBREVIATIONS

ASST.	Assistant	O.R.	Outside Radius
ALUM.	Alumninum	OPEN'G.	Opening
A/C	Asphaltic Concrete	O.C.	On Center
APPROX.	Approximate (ly)	O.D.	Outside Diameter
		O.S.	Outside
BLDG.	Building		
BOT.	Bottom	PLAST.	Plaster
BD.	Board	PART'N.	Partition
BEAR'G.	Bearing	PLAS.	Plastic
BLOCK'G.	Blocking	PNL (S)	Panel (s)
		PL	Plate
		PVC	Polyvinylchloride
		PLYW'D.	Plywood
CONC.	Concrete	P.W.	Plywood
CONF.	Conference	P.D.	Power Driven
CORR.	Corridor		
COL.	Column		
℄	Center Line		
C.T.	Ceramic Tile	R.	Radius
CTSK	Counter Sunk	RM.	Room
CONST.	Construction	R.D.	Roof Drain
CEIL'G.	Ceiling	RETAIN'G.	Retaining
CER.	Ceramic	REINF.	Reinforcing
CAB.	Cabinet	R.	Riser
COND.	Condition	REQ'D.	Required
CHAN.	Channel	RET.	Retaining
C.R.	Cold Rolled		
CONT.	Continuous		
		SHT.	Sheet
		S.C.	Solid Core
DN.	Down	SEC.	Secretary
DEPT.	Department	S.S.	Stainless Steel
DR (S)	Door (s)	SIM.	Similar
DISP'R.	Dispenser	ST.	Steel
DRINK'G.	Drinking	SQ.	Square
DET.	Detail	STL.	Steel
DIA.	Diameter	SYS.	System
DBL.	Double	SPECS.	Specifications
D.	Depth	SC.	Scale
		STOR.	Storage
E.	East		
EQUIP.	Equipment	TEL.	Telephone
ELEV.	Elevation	TYP.	Typical
eq.	Equal	T.P.	Toilet Paper
ELECT.	Electrical	TOIL.	Toilet
EA.	Each	T.	Tread
EXT.	Exterior	TH.	Thick (ness)
EL.	Elevation		
		VERT.	Vertical
F.D.	Floor Drain	V	Vinyl
FIN.	Finish		
FL.	Floor		
FHMS.	Flat Head Met. Screw		
FLASH'G.	Flashing		
FHWS.	Flat Head Wood Screw		
		W.	West
		W/	With
		W.W.	Welded Wire
		W.P.	Weather proof
		WD.	Wood
GWB.	Gypsum Wall Board	W.	Wide
GALV.	Galvanized	WIN.	Window
GA.	Gauge		
H.M. (HM)	Hollow Metal		
HORZ.	Horizontal		
H.C. (HC)	Hollow Core		
HR.	Hour		
H.W.	Hard Wood		
H.	High		
I.R.	Inside Radius		
INT.	Interior		
I.D.	Inside Diameter		
JAN.	Janitor		
LAB.	Laboratory		
LAM.	Laminate		
LAV (S)	Lavatory (ies)		
LAND'G.	Landing		
MECH.	Mechanical		
MGR.	Manager		
MACH.	Machine		
MAT.	Material		
ℳ	Match Line		
MET.	Metal		
MAX.	Maximum		
MIN.	Minimum		
MFR.	Manufacturer		
MOD.	Modified		
MLDG.	Molding		
N.	North		
N.I.C.	Not In Contract		
NO.	Number		

LEGEND

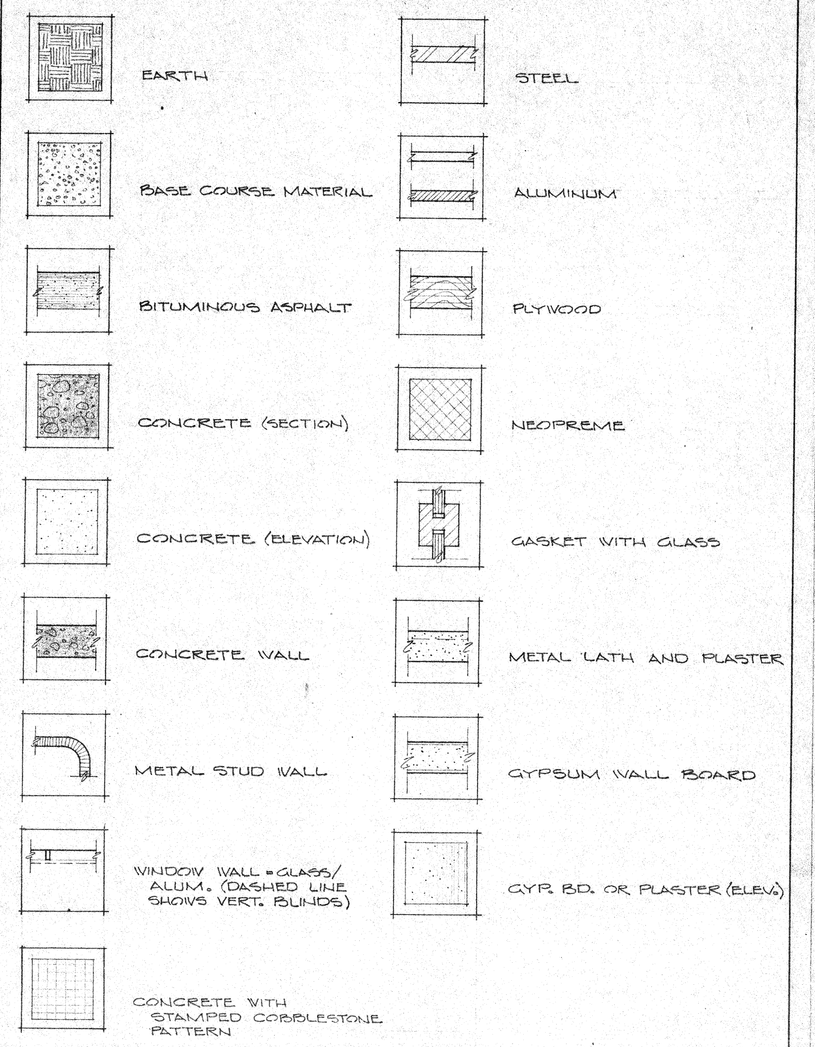

DIMENSIONING

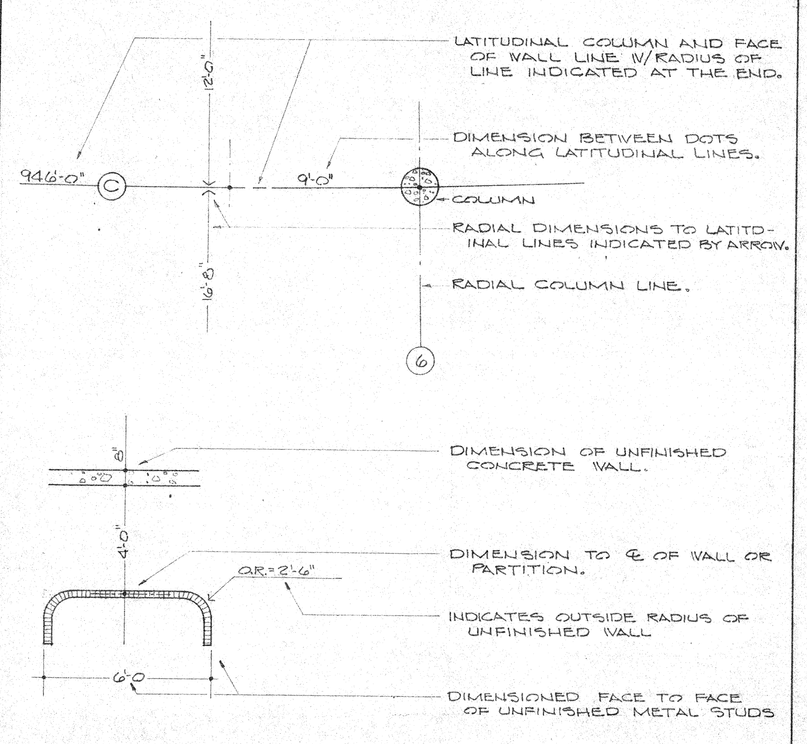

GENERAL NOTES

1. All Work shall be performed and completed in accordance with the highest standards of practice and shall be completely and properly coordinated with all adjacent and related work.

2. The Contractor shall verify on the Site, all conditions affecting the Work. Before commencing work, he shall report to the Architect in writing, all discrepancies between the drawings and specifications and actual existing field conditions. Commencement of work shall constitute acceptance of all conditions affecting the Work.

3. The Contractor shall lay out and correctly establish all lines, levels, grades, and positions of all parts of the Work, and shall be responsible for their accurate and proper correlation to reference lines, property lines and contours.

4. The location of all walls, fixtures, signs, equipment and other miscellaneous items not otherwise dimensioned on the drawings, shall be verified by the Architect before permanent installation.

5. These prints are either full-size or half-size reproductions of the original drawings. Caution should be observed in making any graphic or scaled take-offs. Full-size drawings are 42" x 28", half-size drawings are 21" x 14".

INDEX OF DRAWINGS

GENERAL

		SHT. NO.
	COVER SHEET	1
	INDEX / LEGEND / ABBREVIATIONS & GENERAL NOTES	2

CIVIL

C 1	TITLE SHEET, DETAILS	3
C 2	DETAIL SHEET	4
C 3	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	5
C 4	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	6
C 5	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	7
C 6	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	8
C 7	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	9
C 8	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	10
C 9	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	11
C 10	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	12
C 11	PLAN - GRADING, PAVING, DRAINAGE AND UTILITIES	13
C 12	PROFILE - STORM DRAIN	14
C 13	PROFILE - SANITARY SEWER	15
C 14	PROFILE - NORTH SIDE OF DRIVEWAY	16
C 15	PROFILE - SOUTH SIDE OF DRIVEWAY	17
C 16	PLAN SHOWING SOIL CEMENT TREATED AREAS	18

ARCHITECTURAL

		SHT. NO.
A 1	ARCHITECTURAL SITE PLAN	19
A 2	FLOOR PLAN - SOUTH BUILDING	20
A 3	FLOOR PLAN - NORTH BUILDING/SOUTH END	21
A 4	FLOOR PLAN - NORTH BUILDENG/NORTH END	22
A 5	FINISH SCHEDULE	23
A 6	DOOR SCHEDULE	24
A 7	EXTERIOR ELEVATIONS - WEST & ENDS	25
A 8	EXTERIOR ELEVATIONS - EAST & BRIDGES	26
A 9	ROOF PLAN	27
A 10	ENLARGED PLANS & INTERIOR ELEVATIONS	28
A 11	BUILDING SECTIONS	29
A 12	DETAILS - STAIR & ROOF	30
A 13	DETAILS - STAIR, CONCRETE & MISC.	31
A 14	DETAILS - WALL	32
A 15	DETAILS - DOOR	33
A 16	REFLECTED CEILING PLAN - SOUTH BUILDING	34
A 17	REFLECTED CEILING PLAN - NORTH BUILDING/SOUTH END	35
A 18	REFLECTED CEILING PLAN - NORTH BUILDING/NORTH END	36
A 19	DETAILS - COUNCIL CHAMBER	37
A 20	DETAILS - CABINET WORK	38
A 21	DETAILS - CABINET WORK & MISC.	39
A 22	DETAILS - EXTERIOR CONCRETE	40

STRUCTURAL

S 1	GENERAL NOTES AND TYPICAL DETAILS	41
S 2	FOUNDATION PLAN - SOUTH BLDG.	42
S 3	FOUNDATION PLAN - NORTH BLDG. SOUTH END	43
S 4	FOUNDATION PLAN - NORTH BLDG. NORTH END	44
S 5	ROOF FRAMING PLAN - SOUTH BLDG.	45
S 6	ROOF FRAMING PLAN - NORTH BLDG. SOUTH END	46
S 7	ROOF FRAMING PLAN - NORTH BLDG. NORTH END	47
S 8	COLUMN AND COLUMN FOOTING SCHEDULE	48
S 9	RETAINING WALL AND FOUNDATION DETAILS	49
S 10	FOUNDATION DETAILS	50
S 11	FOUNDATION DETAILS	51
S 12	ROOF BEAM SCHEDULE	52
S 13	ROOF BEAM SCHEDULE	53
S 14	ROOF BEAM SCHEDULE	54
S 15	ROOF SLAB SCHEDULE	55
S 16	FRAMING DETAILS	56
S 17	FRAMING DETAILS	57
S 18	STAIR DETAILS	58

MECHANICAL / PLUMBING

MP 1	PLOT PLAN PLUMBING & PIPING, FIXTURE CONN. SCHEDULE, & LEGEND	59
MP 2	FLOOR PLAN SOUTH BLDG. PLUMBING & PIPING	60
MP 3	FLOOR PLAN NORTH BLDG. SOUTH END PLUMBING & PIPING	61
MP 4	FLOOR PLAN NORTH BLDG. NORTH END PLUMBING & PIPING	62
MP 5	ROOF PLAN PLUMBING	63
MP 6	TOILET ROOM PLUMBING AND SOIL, WASTE & VENT DIAGRAMS	64
MP 7	REFLECTED CEILING PLAN SOUTH BLDG. AIR CONDITIONING	65
MP 8	REFLECTED CEILING PLAN NORTH BLDG. SOUTH END AIR CONDITIONING	66
MP 9	REFLECTED CEILING PLAN NORTH BLDG. NORTH END AIR CONDITIONING	67
MP 10	FOUNDATION PLAN NORTH BLDG. SOUTH END AIR CONDITIONING	68
MP 11	FOUNDATION PLAN NORTH BLDG. NORTH END AIR CONDITIONING	69
MP 12	EQUIPMENT SCHEDULES AND LEGEND AIR CONDITIONING	70
MP 13	EQUIPMENT SCHEDULES AIR CONDITIONING	71
MP 14	DETAILS & DIAGRAMS AIR CONDITIONING	72
MP 15	DETAILS & DIAGRAMS AIR CONDITIONING	73
MP 16	AUTOMATIC TEMPERATURE CONTROL DIAGRAMS	74

ELECTRICAL

E 1	SYMBOLS & LIGHT FIXTURES	75
E 2	SITE PLAN	76
E 3	SINGLE LINE POWER	77
E 4	SINGLE LINE MISCELLANEOUS & DETAILS	78
E 5	POWER PLAN NORTH BLDG. - NORTH END	79
E 6	LIGHTING PLAN NORTH BLDG. - NORTH END	80
E 7	POWER PLAN NORTH BLDG. - SOUTH END	81
E 8	LIGHTING PLAN NORTH BLDG. - SOUTH END	82
E 9	POWER PLAN SOUTH BLDG.	83
E 10	LIGHTING PLAN SOUTH BLDG.	84
E 11	PANEL SCHEDULES	85

ROBERT MASON HOUVENER ARCHITECT
7760 GIRARD AVENUE LA JOLLA, CALIFORNIA 92037 TELE. 714/459-6869

CIVIC CENTER
CITY OF THOUSAND OAKS, CALIFORNIA

INDEX / LEGEND / ABBREVIATIONS & GENERAL NOTES

REVISIONS:

INDEX

SHT. 2.